



Doric Ventus Louvre Galleries are the ultimate solution to Let the breeze in.™

Though louvre design has changed a great deal since their early days, one thing has remained constant... louvres are the only window system that gives you a

100% OPENING ADVANTAGE

This means louvres are the most practical window system when it comes to taking advantage of breezes and natural ventilation. Louvres offer the least resistance to air flow, open them for the full breeze effect, tilt them for ventilation on a rainy day, or simply close them to seal the home and protect it from elements.

Louvres practicality means that they can be used anywhere or better yet, everywhere. Use louvres to open up a room or the entire house to fresh air and cool breezes. Cooling and ventilating your home with fresh, natural breezes is not only healthy, but also energy efficient.

IT'S ALL IN THE NAME

Vent, the 100% opening advantage

Ergonomic handle design

Non-Scratch UV stabilised powder coat

Tested to meet AS4420 test methods and passed AS/NZS2047-2014

UV stabilised state-of-the-art polymer components

Sleek and elegant design when opened and closed

Ventus Louvre Galleries offer modern attractive louvre blade clips, a range of handles options and performance tested beyond the Australian Standard requirements. Ventus Louvre Galleries are an outstanding choice for homes and commercial premises across Australia.

The louvre clips have been designed and manufactured to hold 6mm toughened or float blade glass* with a maximum length of up to 950mm in both 102mm and 152mm blade lengths.

FEATURES

- Made from non-toxic, environmentally friendly, UV stabilised, non-corrosive and resilient materials
- Window restriction compliant
- Tested, passed and certified under the most stringent Australian tests
- 6 year warranty
- Automated louvre version available

ADVANTAGES

- Energy efficient louvre windows for maximum energy savings
- Highest performing standard louvre product in Australia
- Offset clips allow clearance of screens when installed in commercial main frame

COLOUR OPTIONS



Satin Black Pearl White Silver Monument Custom (on request)

BLADE SIZES

Ventus Louvres are available in two sizes with the 102mm best choice when screens are fitted.



152mm Series

102mm Series

SPECIFICATIONS FOR GLASS:

Thickness: 6mm
Glass Type: Toughened or float blade glass
Max Length: 950mm

* Glass Blades not included.
Laminated glass not suitable with Ventus Louvres



CONTROL OPTIONS

MANUAL



STANDARD HANDLE

The most common choice for louvre control, Standard mechanism galleries provide good closing pressure and are adequate for most applications with a recommended blade spans of up to 900mm



LOW PROFILE HANDLE


Providing the user an option for a low profile handle and ring pull in one. This handle is perfectly suited to galleries with blinds or curtains installed or high out of reach windows that require a hook rod to operate.

AUTOMATED



AUTO LOUVRES


The Auto Louvre system allows users to open and close the Louvres with a remote, wall switch or Cbus/ BMS connection. The motor is hidden in the Gallery framing and connected by a plug and play control unit powered by a 24V DC power pack.



8 Channel Controller



2 Pin Plugs
(Power and Motors)




1 Channel Controller




4 Pin Plugs
(Accessories)

GALLERY HEIGHTS & HANDLE LOCATION

VENTUS LOUVRE GALLERY - 102mm SERIES

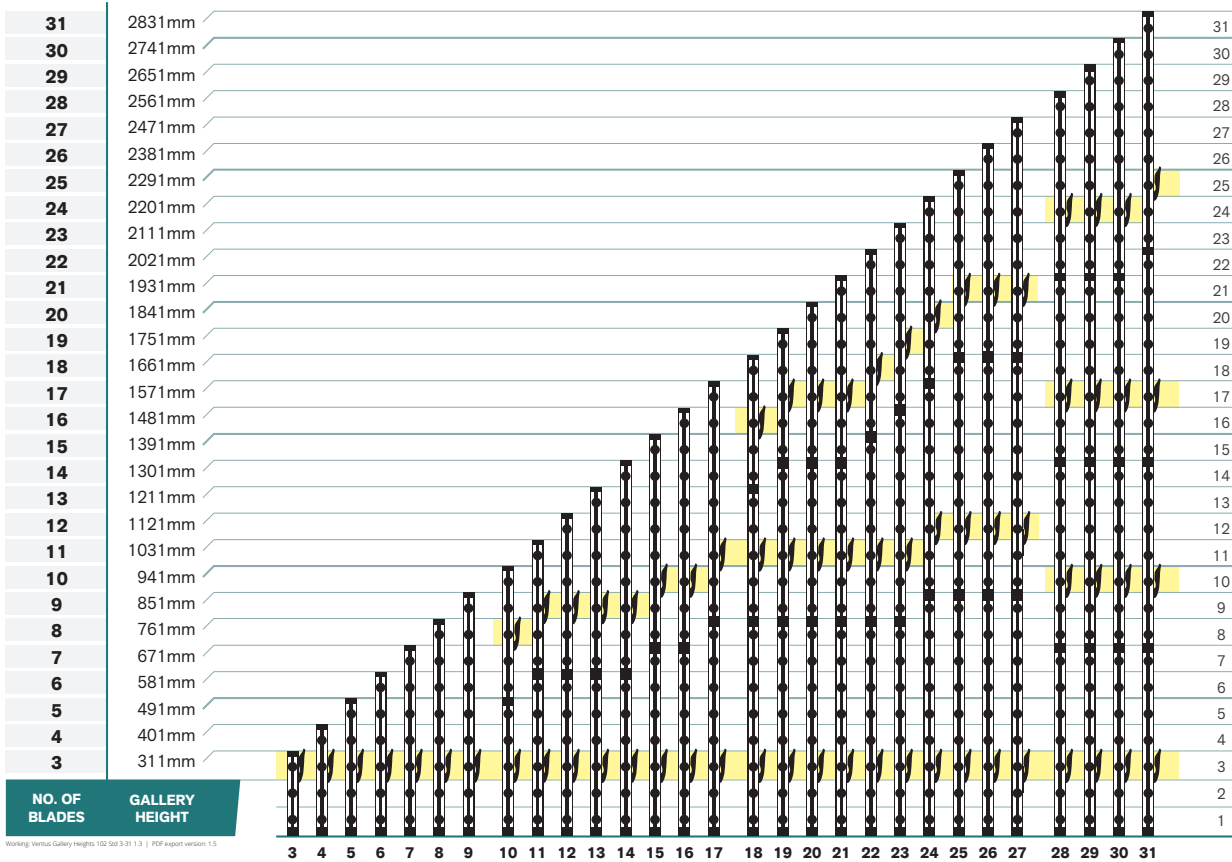


VENTUS LOUVRE GALLERY - 152mm SERIES

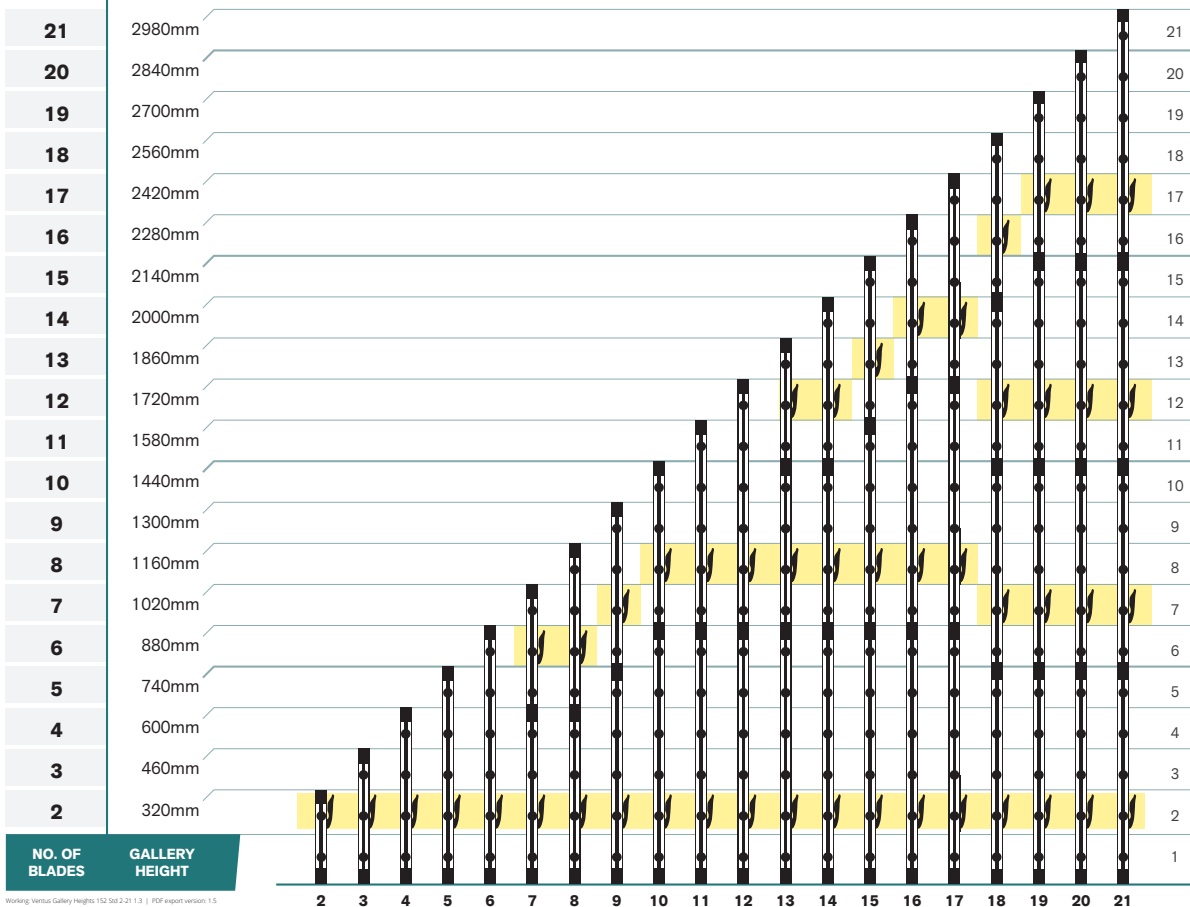

GALLERY HEIGHTS & HANDLE LOCATION


VENTUS LOUVRE GALLERY - 102mm SERIES

RESTRICTED

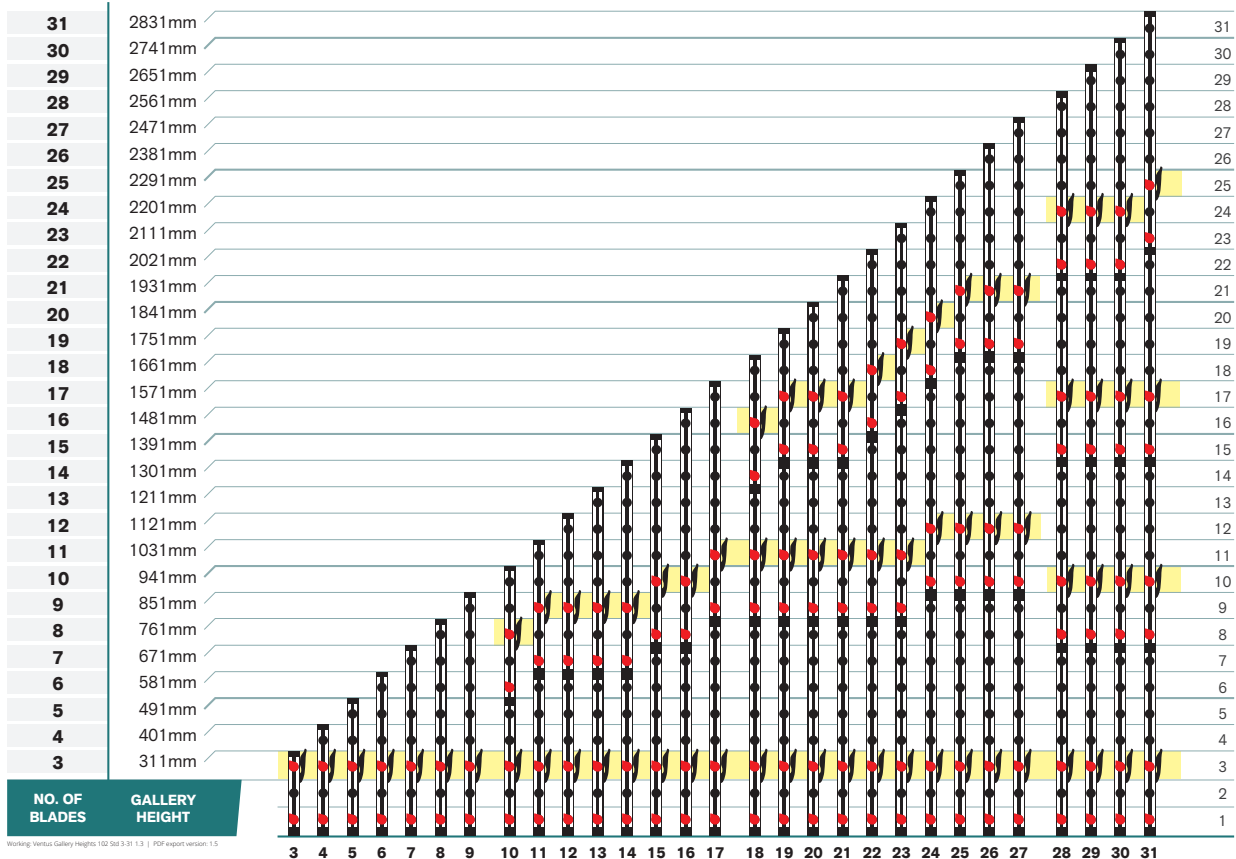

VENTUS LOUVRE GALLERY - 152mm SERIES


RESTRICTED

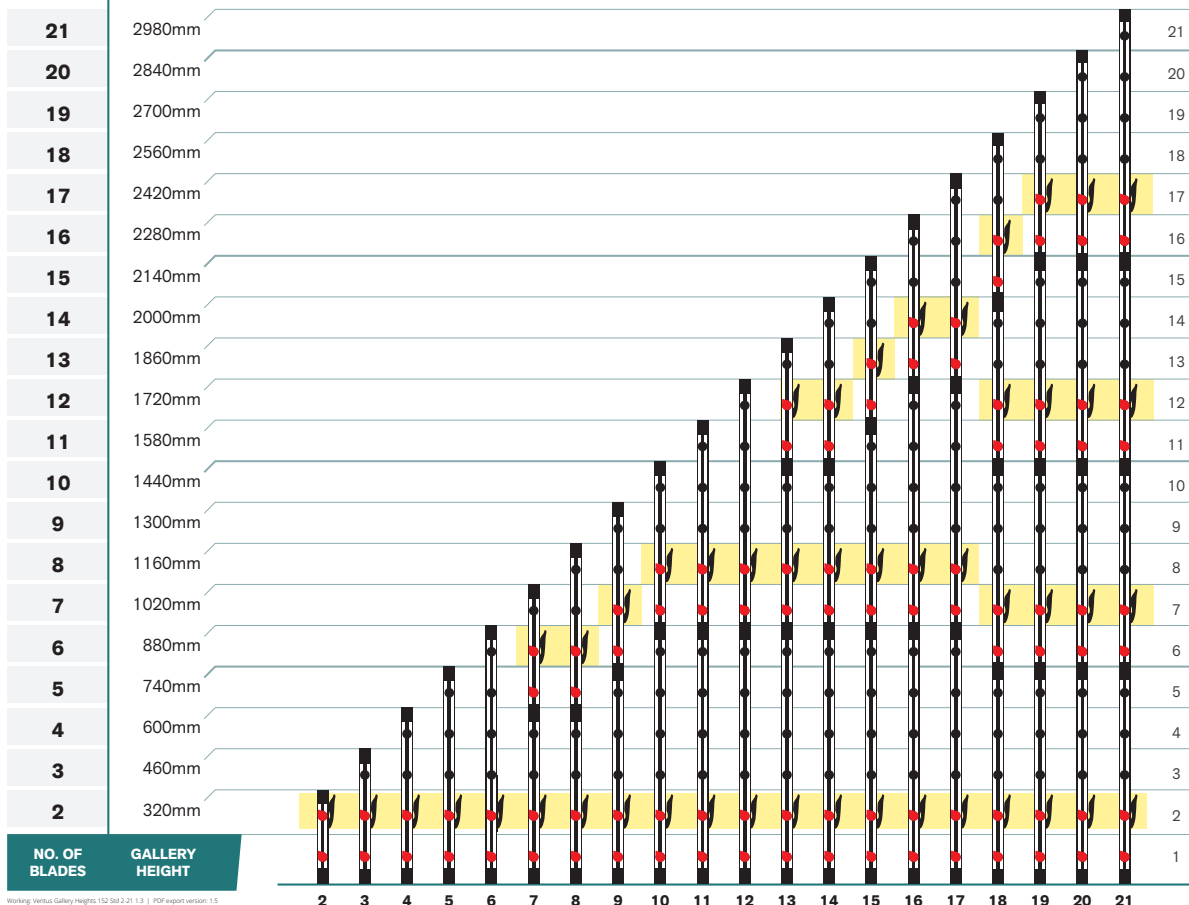

GALLERY HEIGHTS & HANDLE LOCATION


VENTUS LOUVRE GALLERY - 102mm SERIES

WITH LOUVRE LOC

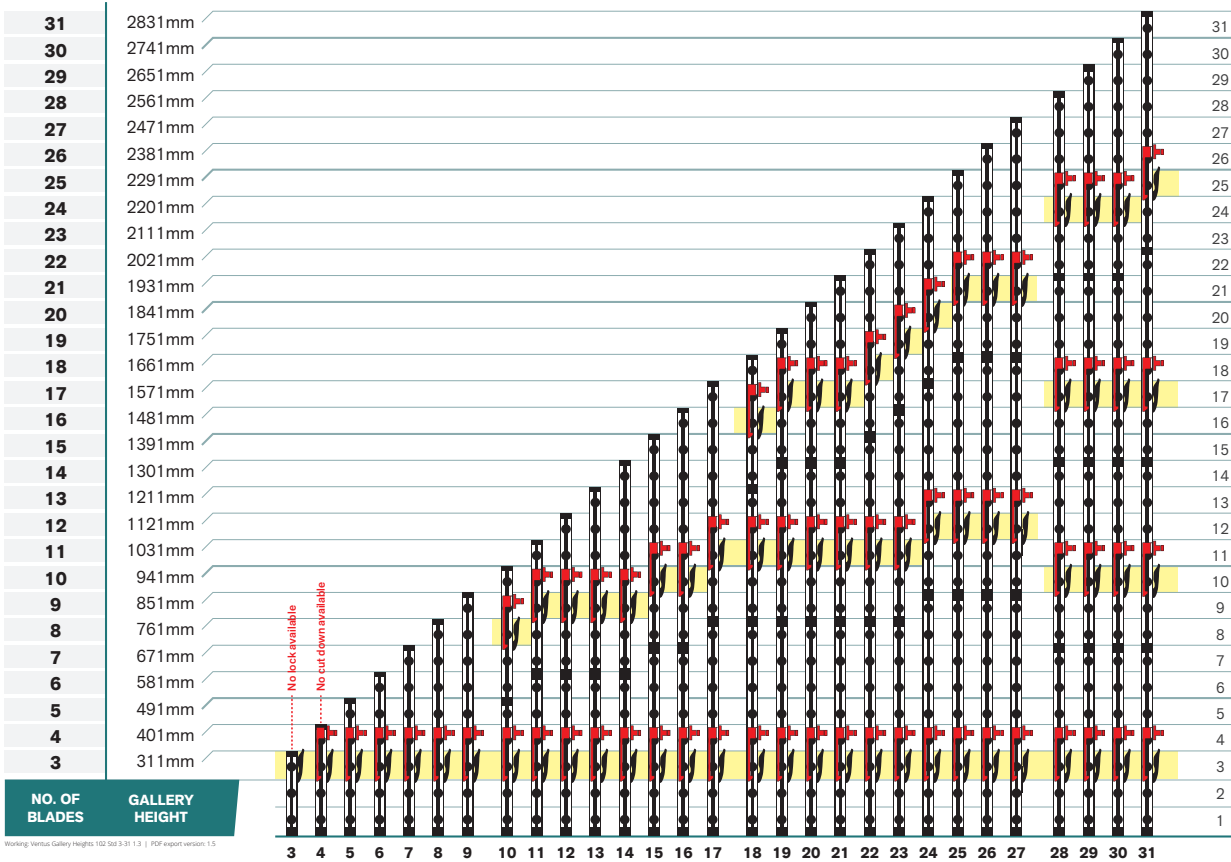

VENTUS LOUVRE GALLERY - 152mm SERIES

WITH LOUVRE LOC

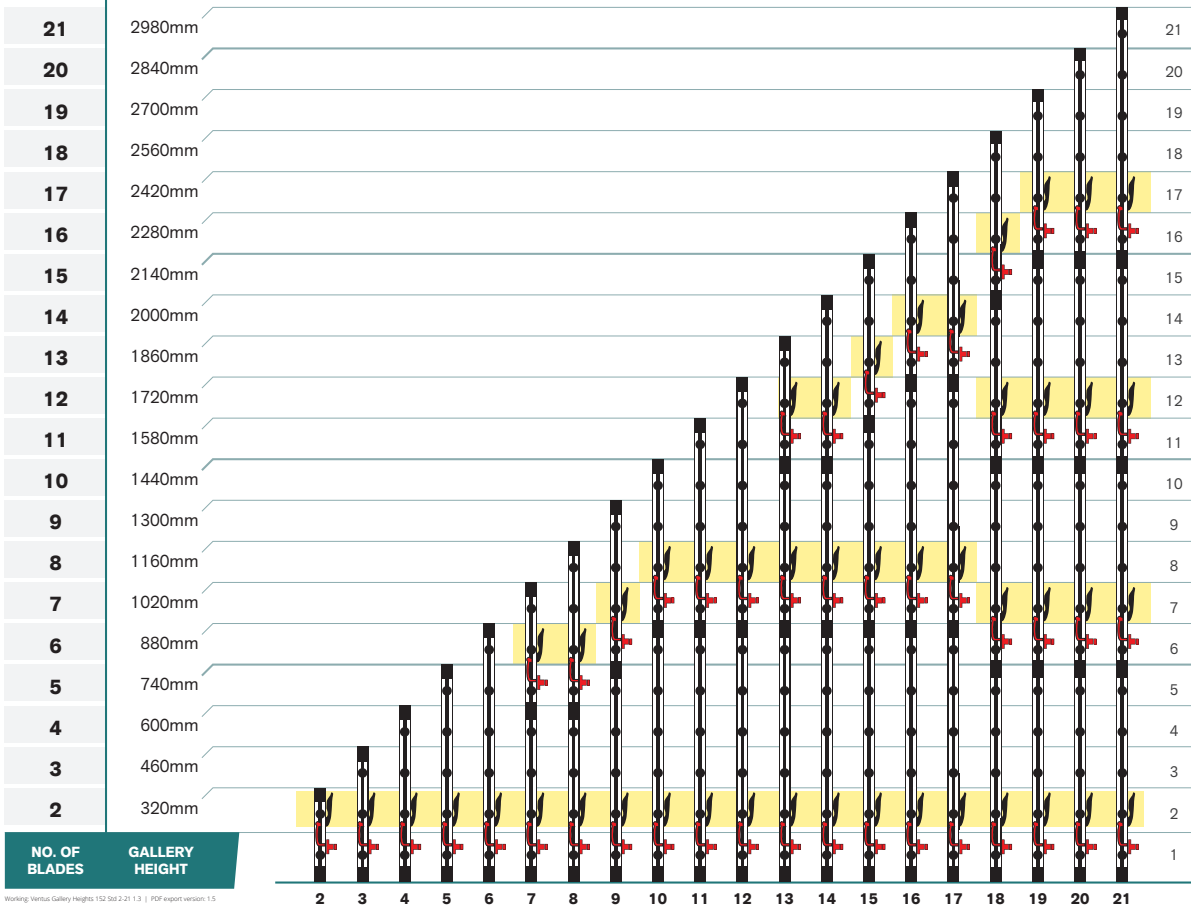


GALLERY HEIGHTS & HANDLE LOCATION

VENTUS LOUVRE GALLERY - 102mm SERIES

RESTRICTED


WITH LOUVRE LOC®

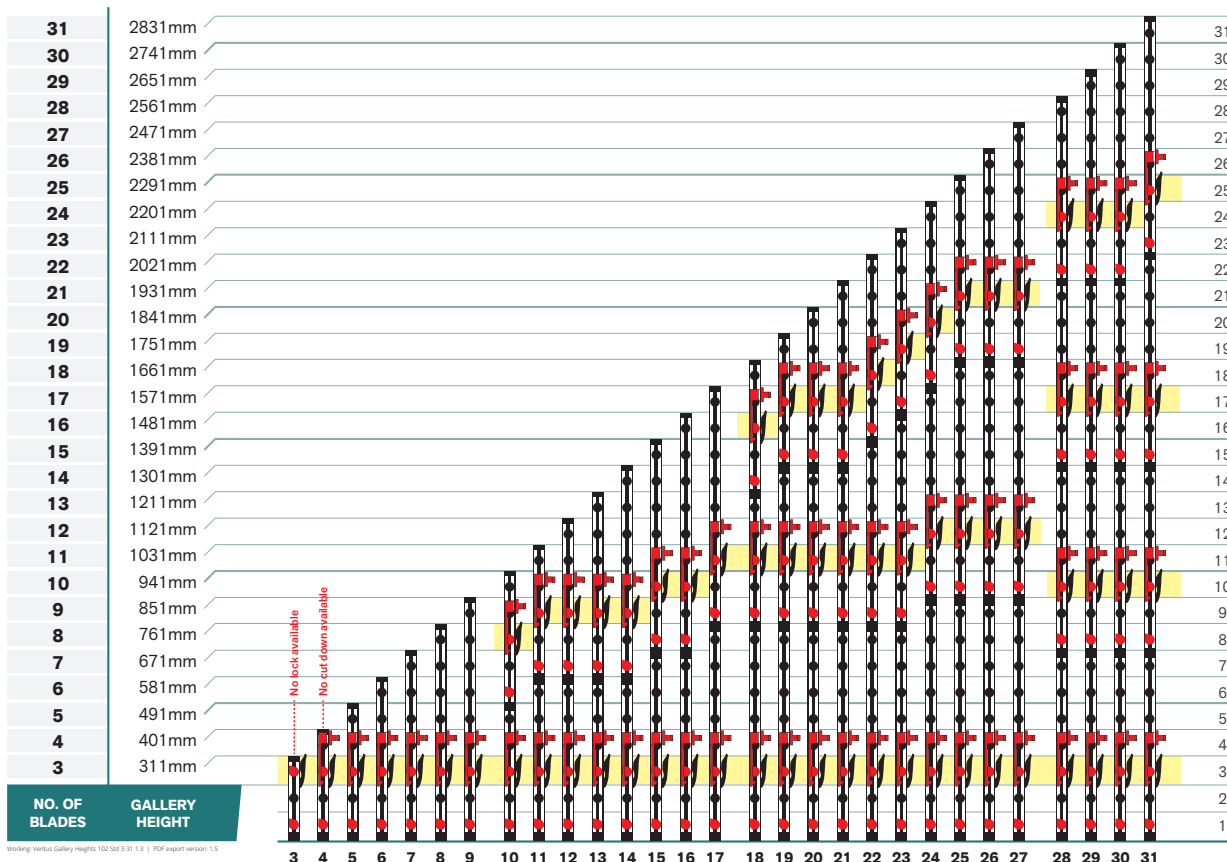


VENTUS LOUVRE GALLERY - 152mm SERIES

RESTRICTED

WITH LOUVRE LOC®

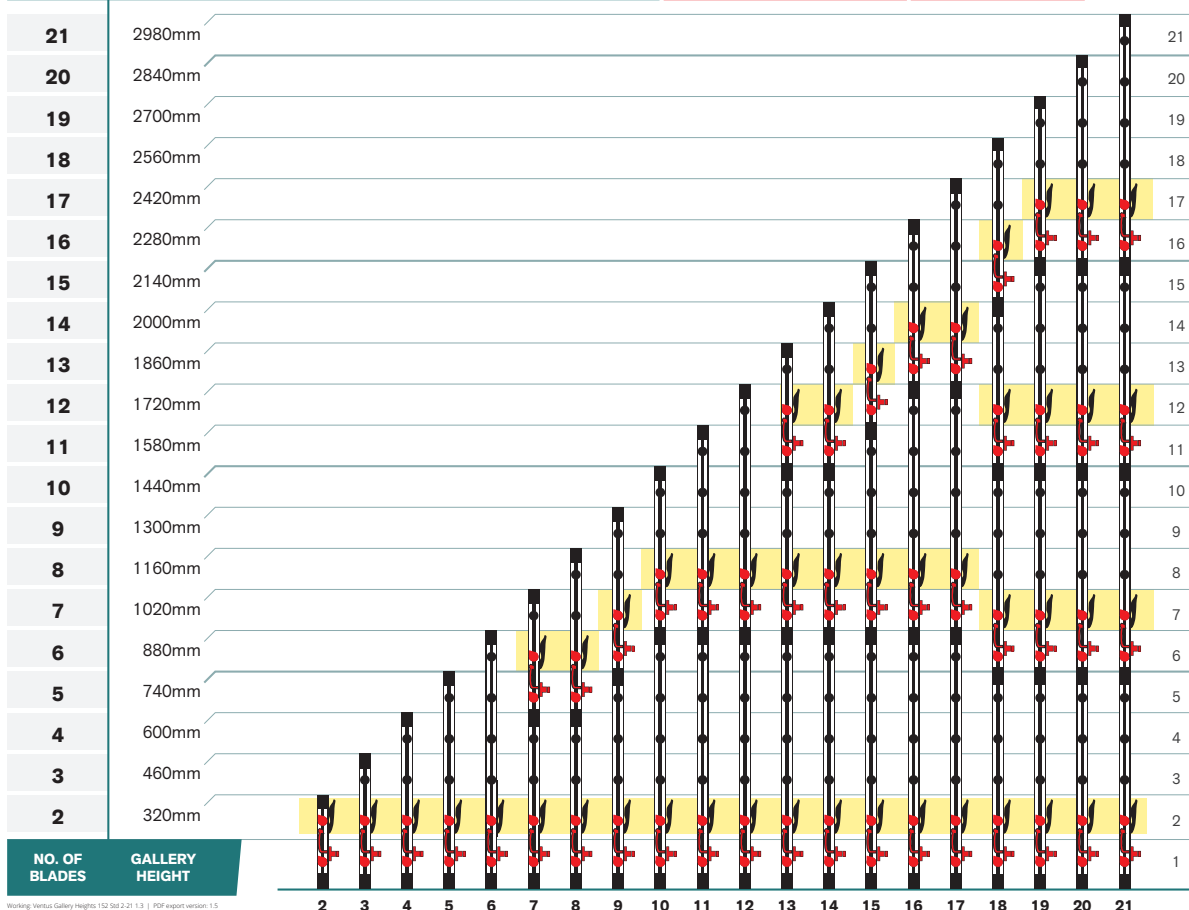

LOUVRE LOC

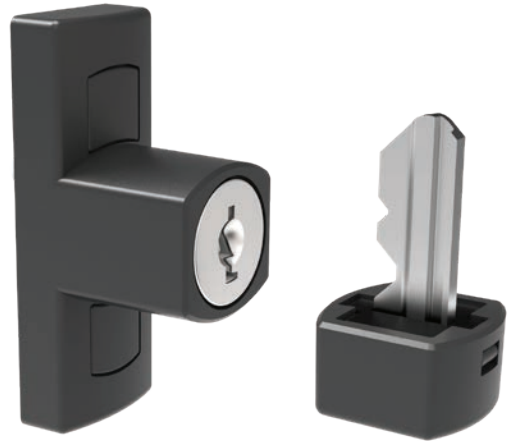

The Ventus Louvre Loc offers a convenient, easy to use method in securing your louvres when in the closed position.

It works just like a window, the Louvre Loc lets you close then lock the louvres for security and peace of mind. Louvre Loc is available for 152mm Series & 102mm Series of Ventus Louvre Systems.

Designed in Australia by Doric, the Louvre Loc fits within the existing ventus louvre system without any modifications other than drilling the channel for mounting the lock.

ADVANTAGES



Easy to use - a simple turn of the snib key secures the louvres when shut.



Removable Snib - Unique Australian design turns the snib lock into a removable key for added security.





Key Compatibility - Operates with Snib Key or Doric C4 key profile.



Smart innovative design - An Australian design lead by Doric's R&D team assuring the highest quality and standards.



Colour matched to channels - when ordered together with louvre galleries.

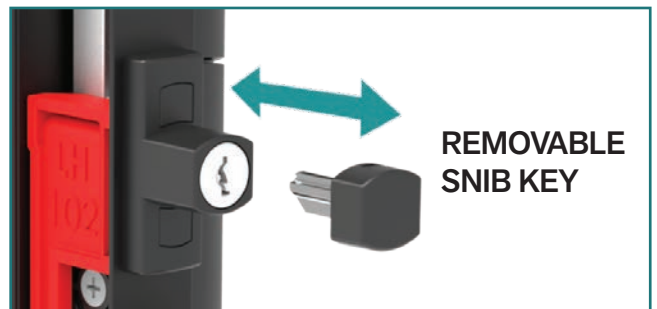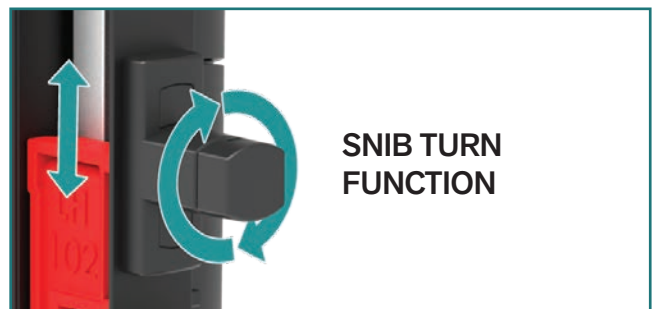

COLOUR OPTIONS



Black



Silver



White



Monument

VENTUS | LOUVRE LOC

102mm SERIES LOUVRE LOC

For the 102mm Series Louvre the Louvre Loc is fitted above the handle. When engaged, the locking arm slides down to obstruct and lock the handle.



COMPATIBLE HANDLES:

- Standard
- Low Profile



GALLERY CLOSED
LOCKED POSITION
SNIB KEY IN



GALLERY CLOSED
UNLOCKED POSITION
SNIB KEY OUT



GALLERY OPEN
UNLOCKED POSITION
SNIB KEY IN

152mm SERIES LOUVRE LOC

The 152mm Series Louvre, the Louvre Lock is located below the louvre handle, operating the red locking arm inside the channel that slides up to obstruct and lock the handle in place.



COMPATIBLE HANDLES:

- Standard
- Ring Pull
- Low Profile
- Dual Handle



GALLERY CLOSED
LOCKED POSITION
SNIB KEY IN



GALLERY CLOSED
UNLOCKED POSITION
SNIB KEY OUT



GALLERY OPEN
UNLOCKED POSITION
SNIB KEY IN



Installation Video:

YouTube:
102 Louvre Loc Overview & Installation



Installation Video:

YouTube:
152 Louvre Loc Overview & Installation



VENTUS | AUTOMATED LOUVRE GALLERIES

Doric Ventus Automated hardware provides a complete range of automated hardware for residential and commercial applications.


Auto Louvre hardware is a control option available for Ventus Louvre Galleries. It's an easy to install 24V DC 'Plug & Play' system that does not require an electrician for simplicity and reliability.

Doric Ventus Automated Hardware can be used in floor to ceiling systems as well as operating galleries in those hard to reach areas.


PLUG&PLAY SYSTEM

The Doric Ventus 'Plug & Play' system consists of a range of controllers and motors connected via quick connect plugs.

The 'Plug & Play' system offers control for up to 8 windows and capable of operating all at the same time.



MR551
8 Channel Controller



MR536
1 Channel Controller




2 Pin Plugs
Power and Motors




4 Pin Plugs
Accessories

REMOTES & CONTROLS


One controller can be connected to an infinite number of switches, allowing you to put the controls where you want for absolute convenience.



WT211
1-Channel
wireless
wall mounted
switch



WT215
5-Channel
wireless
wall mounted
switch



MS541
Wired
wall mounted
switch



RT111
1-Channel
wireless remote
control



RT1116
16-Channel
wireless remote
control



WATCH OUR VIDEO:
VENTUS AUTOMATED HARDWARE

YouTube Alchin Long Group



COLOUR OPTIONS

(Gallery Channel and Blade Clips only, excludes glass)



Satin Black



Pearl White



Silver



Custom
(on request)

**IP32
RATED**

When installed according
to installation instructions




**OPERATES ON ALL
BMS & C-BUS**



C TICK Certified

CONNECTION QUICK GUIDE

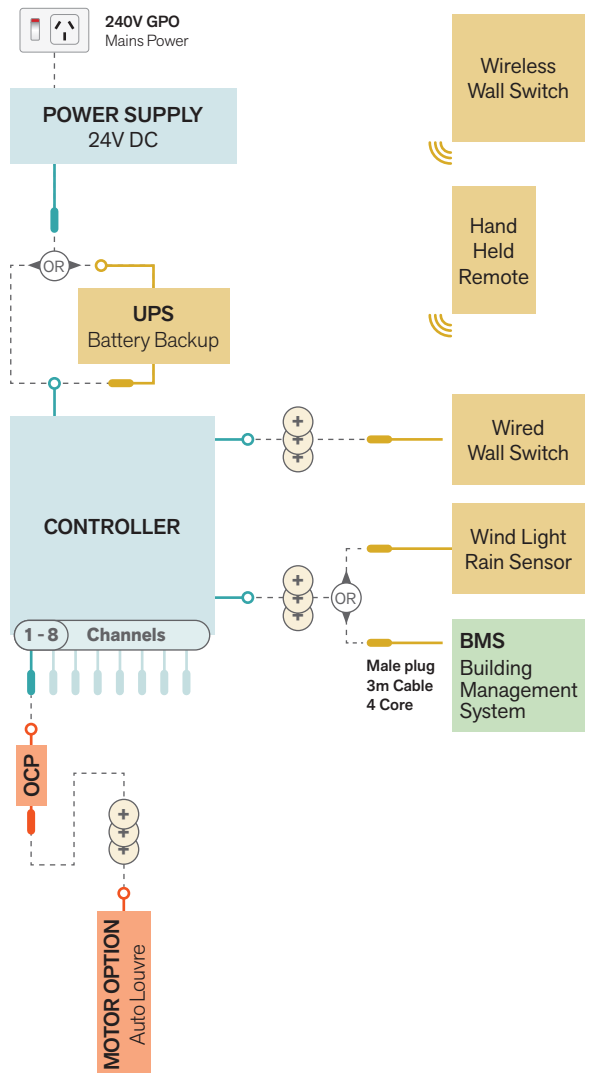

SELECTION REQUIREMENTS:

BASE/MINIMUM

For the system to work, these are the base required hardware

EXTENSION OPTIONS

These items are added if required

MOTOR OPTION

Auto Louvre motor



**ADDITIONAL 'PLUG & PLAY'
EXTENSION LEADS AVAILABLE**



EITHER/OR OPTION




AVAILABLE CHANNELS
Repeat wiring per available channel as required

IMPORTANT:


- System and Motors operate on 24V DC
- Repeat wiring for each channel/gallery as required
- Comprehensive electrical drawings and component lists are available on the Doric website

GALLERY HEIGHTS & MOTOR LOCATION

VENTUS LOUVRE GALLERY 102mm AUTO

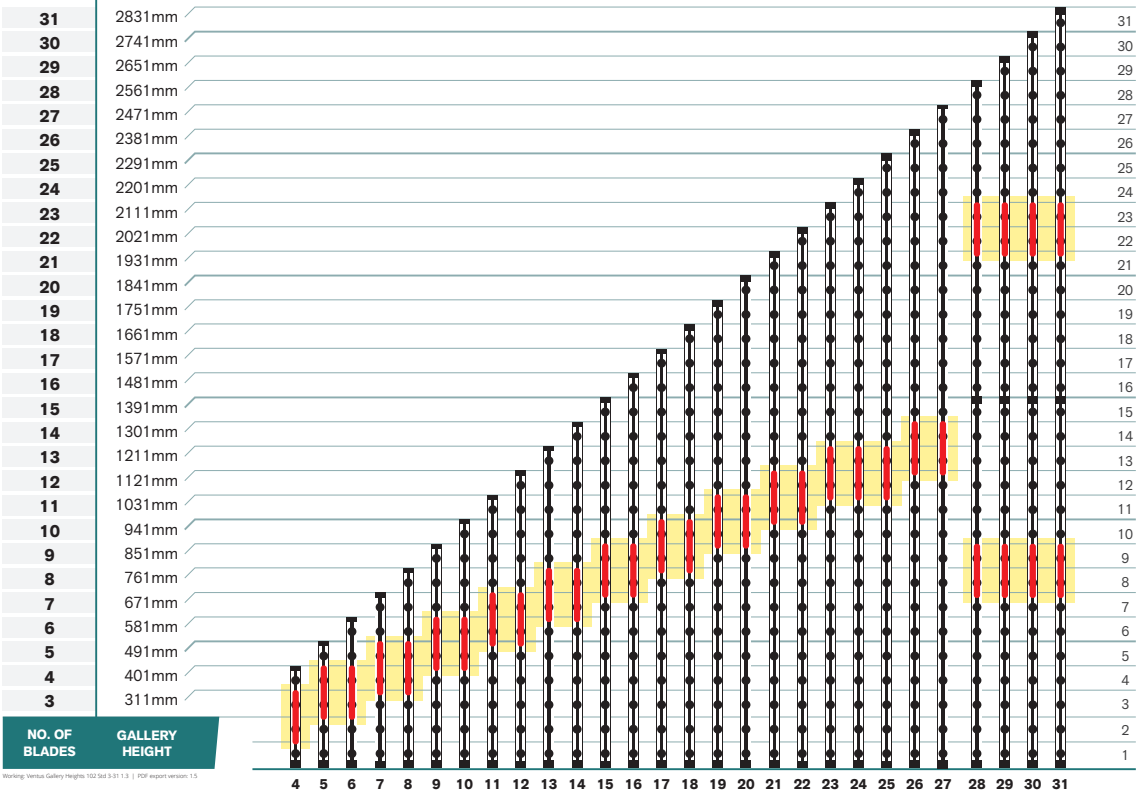

VENTUS LOUVRE GALLERY 152mm AUTO

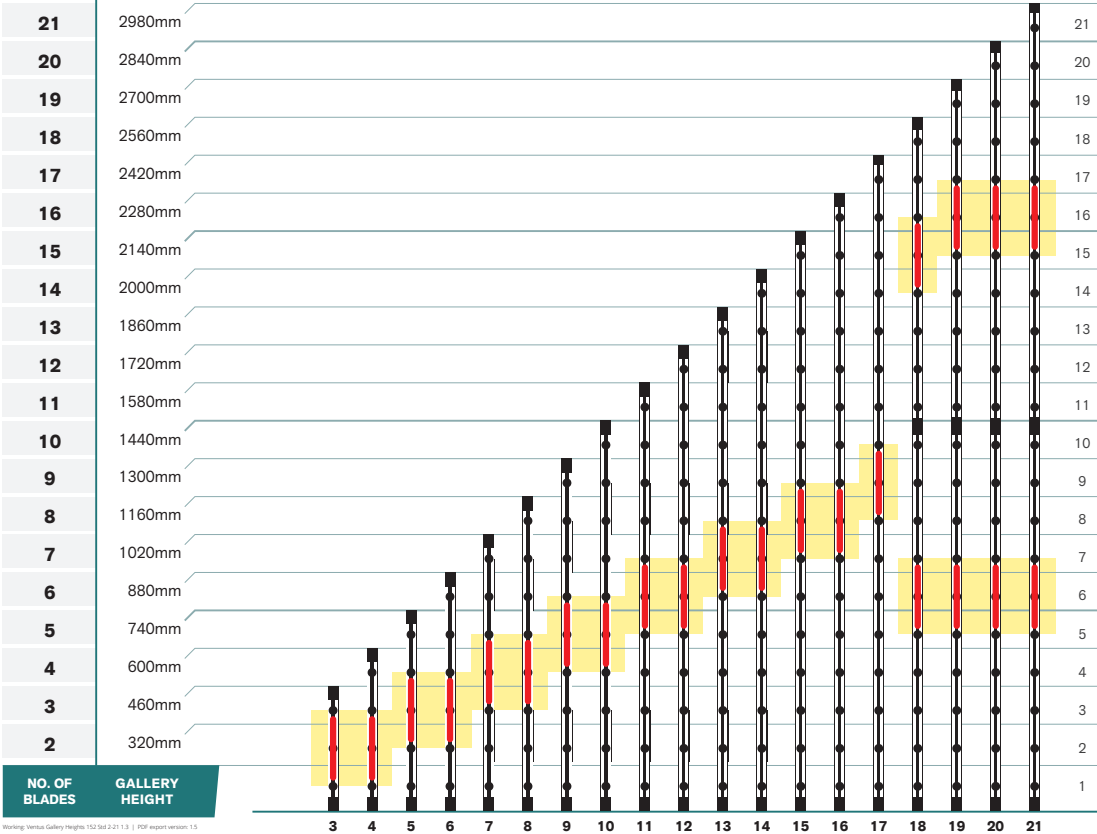

**MOTOR
LOCATION**

Note:
Heights greater
than the heights
displayed are
possible as
engineered
solutions


AUTO LOUVRE & OCP

An OCP (Over Current Protection) is a device that plugs in line directly to the Auto Louvre motor offering protection from damage.

In part owing to the louvre motors compact design and needing to fit within the gallery frame, the OCP is a separate device. It is recommended to be installed in the cavity or ceiling space next to the Control Box (controller) making it easier to access, troubleshooting faults, or swapping out a damaged unit.

The OCP operates like a fuse, designed to be a last line of defense to stop over current surges and spikes from reaching the motor. In the event this happens, the motor will temporarily not work until the OCP is replaced. The great advantage in protecting it like this avoids requiring extensive disassembly of the glass and galleries to access the motor for replacement. It's a matter of unplug and re install the OCP by the controller.

Every Auto Louvre motor requires a Over Current Protection (OCP) and one is supplied with every motor.

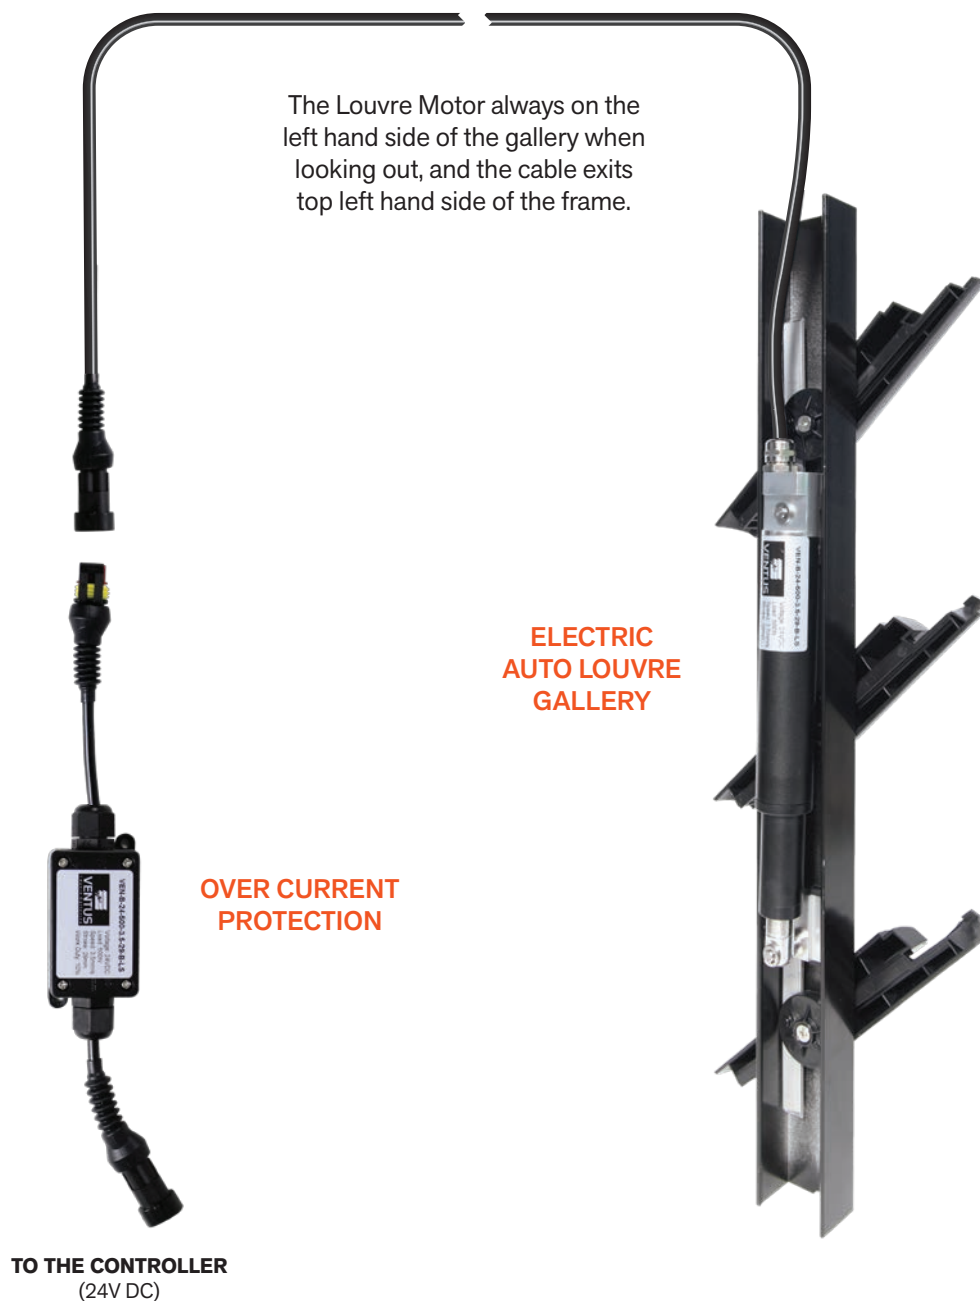

FALL PREVENTION AND BLADE RETENTION

Ventus louvres have been tested to exceed requirements as stated by the BCA in both Fall Prevention and Blade Retention. Testing proved that a sphere of 125mm will not pass through the louvre when a horizontal outward force of 250N is applied. Restricted louvres with blades of up to 850mm are achieved when a dedicated permanent restrictor caps are installed. This means that the louvre restrictor cannot be removed or unlocked or over ridden.


Ventus Louvres exceed the fall prevention requirements as stated by the BCA with restrictor cams applied. They have been tested and exceed the required 250N.

Testing proves that a 125mm sphere will not pass through the louvre when a horizontal outward force of 250N is applied.


The Ventus Louvre Clip design achieves higher levels of blade retention when tested. Testing proved that with sustained loads being applied to the blades in accordance with the ICP005, the glass is safely retained in the clips without the need for further mechanical locking. The Ventus Gallery is the perfect choice of window for openings in high applications, multi-story, patio and balcony enclosures or winter gardens.



FALL PREVENTION

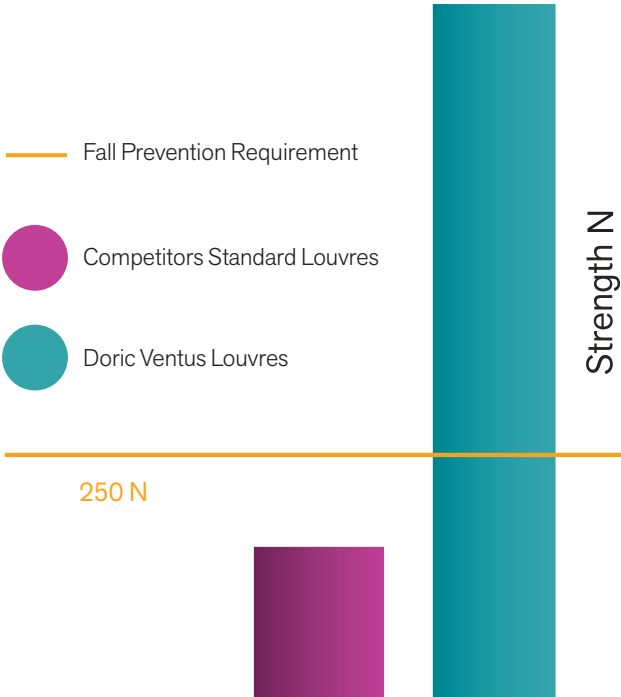

BLADE RETENTION

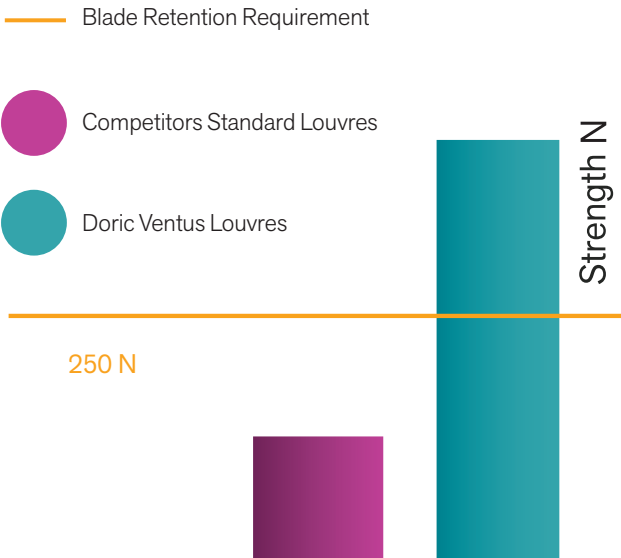




DO WE STAND UP TO THE ELEMENTS?

PASSED

By combining cutting edge design, quality materials and precision manufacturing we built a gallery that is all about performance. We put the Ventus Louvre gallery through one of the most stringent testing regimes on the planet - the AS4420 (Testing methods for windows), and certified it in accordance to AS2047-1999 (Windows in buildings).



GENERAL RETROFIT ASSEMBLY

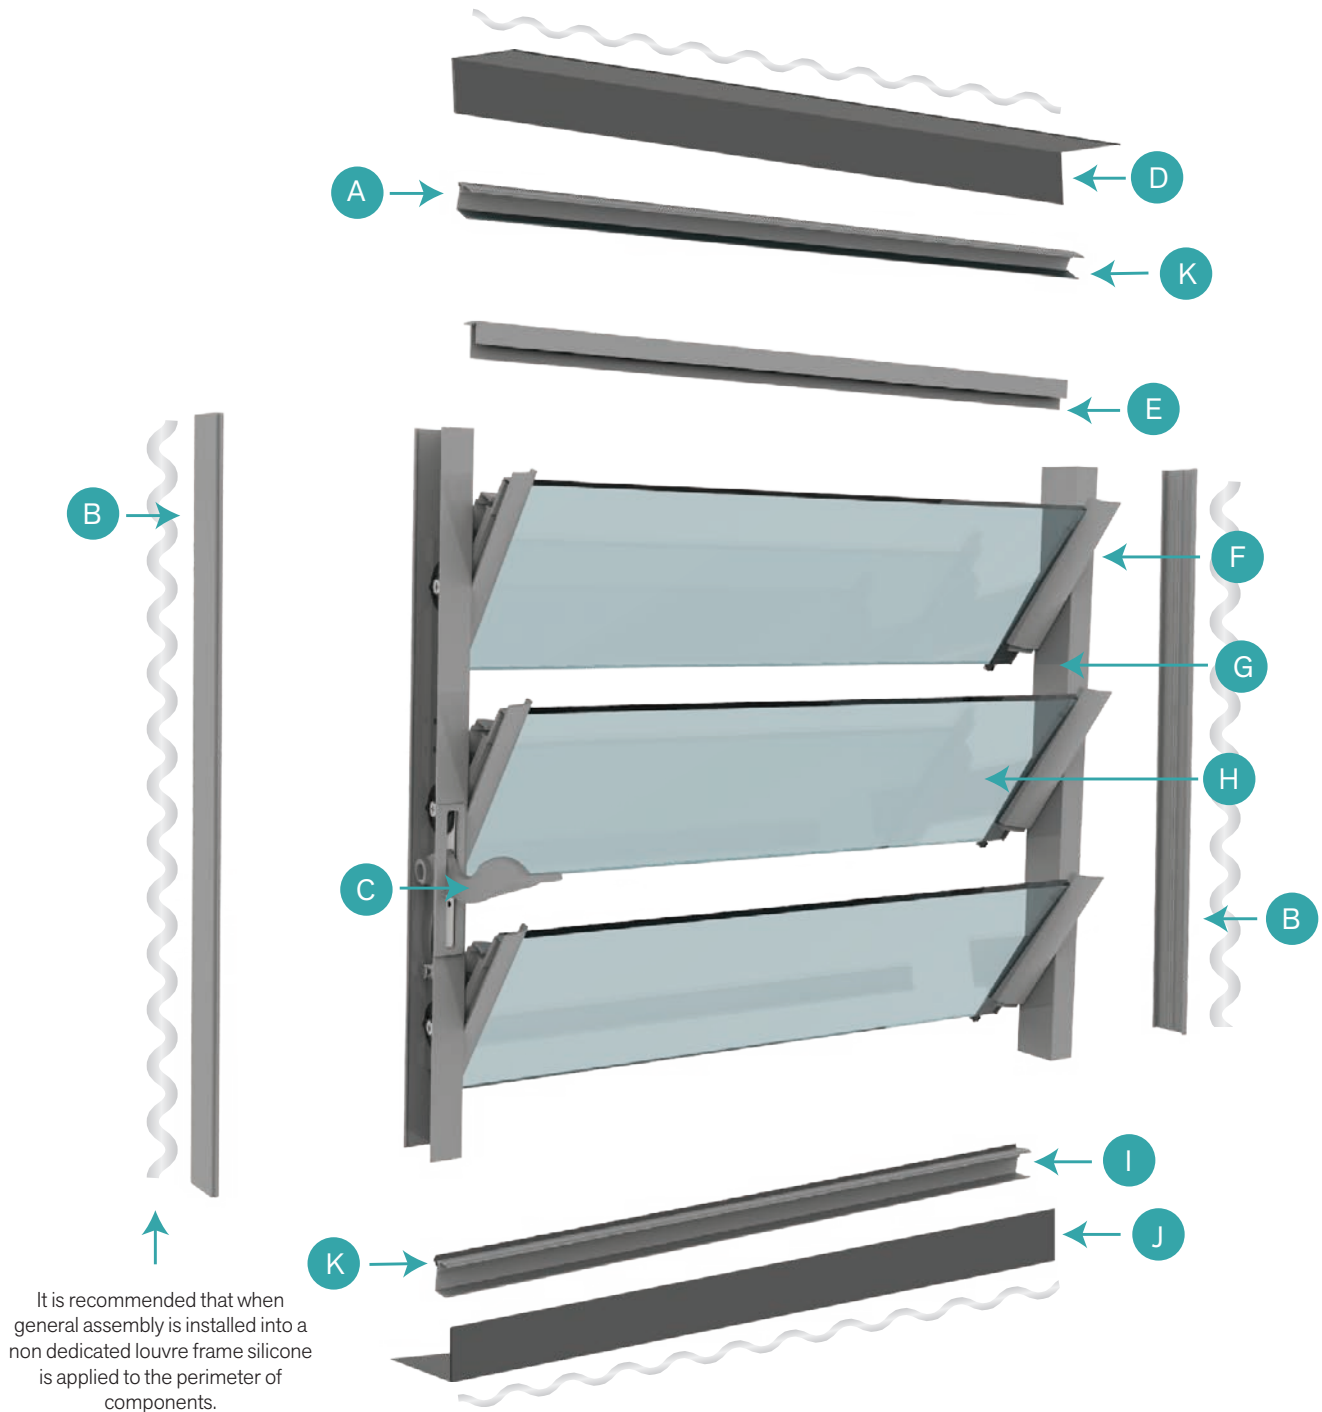








- A. Weather Strip (Top) - AL1309
- B. Gallery Adaptor - AL1312
- C. Louvre Gallery Handle
- D. Plant On Sill and Head - AL1314
- E. Fixed Blade Carrier (Optional) - AL1310
- F. Blade Clip
- G. Gallery Channel
- H. Glass Blade*
- I. Weather Strip (Bottom) - AL1309
- J. Plant On Sill and Head - AL1314
- K. Rubber Weather Seal



Watch Video:
YouTube:
Retrofit Louvre Gallery Assembly Overview

COMPONENTS & PART NUMBERS

| Components | | Part # | Description | | | | |
|---|---|----------------------|---|------------|----------------------|-------------------------------|----------------|
| <div>C</div> <div>F</div> <div>G</div> <div>H</div> |  | LRVG-152-03-S-LN-BLK | 152mm Louvre Gallery | | | | |
| | | Louvre Gallery | Clip (mm) | No. Blades | Handle | Handle Side | Colour |
| | | LVRG | 152 | 03-31 | S Standard | LN Left Hand No Holes | B Black |
| | | | | | L Low Profile | RN Right Hand No Holes | W White |
| | | | | | S Silver | | |
| | | | | | M Monument | | |
| | | | | | C Custom | | |
| Please note glass is for illustration purposes only | | | | | | | |
| <div>C</div> <div>F</div> <div>G</div> <div>H</div> |  | LRVG-102-03-S-LN-BLK | 102mm Louvre Gallery | | | | |
| | | Louvre Gallery | Clip (mm) | No. Blades | Handle | Handle Side | Colour |
| | | LVRG | 102 | 02-21 | S Standard | LN Left Hand No Holes | B Black |
| | | | | | L Low Profile | RN Right Hand No Holes | W White |
| | | | | | S Silver | | |
| | | | | | M Monument | | |
| | | | | | C Custom | | |
| Please note glass is for illustration purposes only | | | | | | | |
| <div>D</div> <div>J</div> |  | AL1314 | Plant on Weatherstrip | | | | |
| | | | * Extrusion sold in 3m lengths | | | | |
| <div>A</div> <div>I</div> |  | AL1309 | Weatherstrip (Top & Bottom) | | | | |
| | | | * Extrusion sold in 3m lengths | | | | |
| <div>E</div> |  | AL1310 | Fixed Blade Carrier (Optional) (used to support glass in fixed blade application) | | | | |
| | | | * Extrusion sold in 3m lengths | | | | |
| <div>B</div> |  | AL1312 | Louvre Retro Fit Adaptor (Used when gallery installation is not installed in dedicated louvre frame) | | | | |
| | | | * Extrusion sold in 3m lengths | | | | |
| <div>K</div> |  | 9048993 | Rubber Louvre Seal Roll - 250m | | | | |
| | | 9049767 | Rubber Louvre Seal - 3m | | | | |

VENTUS GLASS DEDUCTION



(Glass Deduction = Opening Size minus 68mm)

Note: Ventus Louvres are suitable for 6mm thick glass

MANUAL LOUVRES

MANUAL

Opening Size
minus -
68mm
= GLASS SIZE



(Glass Deduction = Opening Size minus 113mm)

Note: Ventus Louvres are suitable for 6mm thick glass

AUTO LOUVRES

AUTO

Opening Size
minus -
113mm
= GLASS SIZE

Glass Blades not included. Fits 6mm toughened or float blade glass required. Laminated glass blades are not recommended for louvres as exposure to UV and sunlight deteriorates laminate edges; and where AS1288-2006 Glass in Buildings - Selection & Installation 5.12 is in effect, Grade A toughened safety glass is required.

Doric does not warrant any Ventus Louvre Galleries where laminate glass has been installed. The system is not designed to take laminate glass as it creates excess force on the handles and binds the blades.

FIXED BLADE DEDUCTIONS

FOR NON STANDARD HEIGHT




A fixed blade is used when the height of the opening is smaller than that of a standard gallery height.

For example a window size of 2200mm will require a 16 blade (2280mm) gallery. This will be cut down 80mm to 2200mm and the top clip disconnected and screwed off into the fixed position.

Fixed blade installation instructions:

1. Select the blade that is one size bigger than opening dimension. (refer to standard height chart. Example: if opening height is 2200mm a 16 blade, i.e. 2280mm is required)
2. Trim channel and clip to suit (see deduction area)
3. Disconnect link arms from pivot cap
4. Cut link arms
5. Screw through the blade clip + to the gallery channel from inside the glazing pocket
6. When a blade is less than 152mm a fixed blade carrier as shown below is required to be screwed into the frame to support the glass

Note: A fixed blade is required to be sealed and supported. To do this, screw AL1310 and AL1314 into the outer frame and then install the glass where indicated "X"

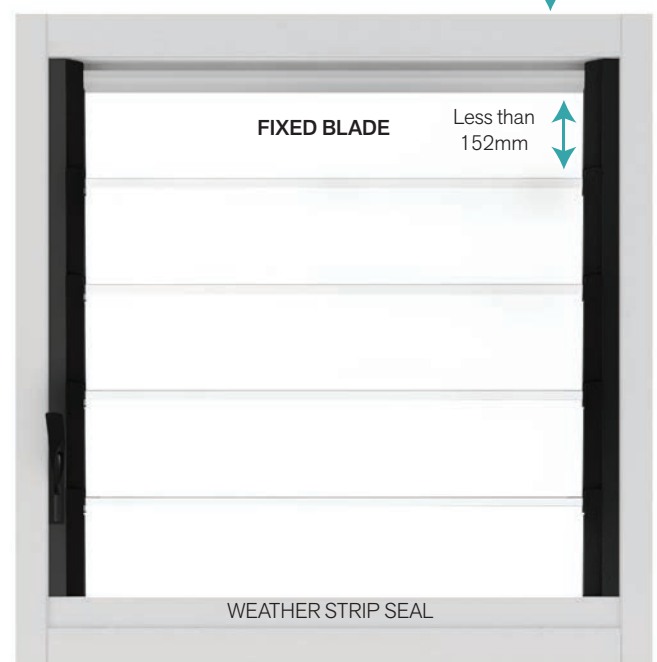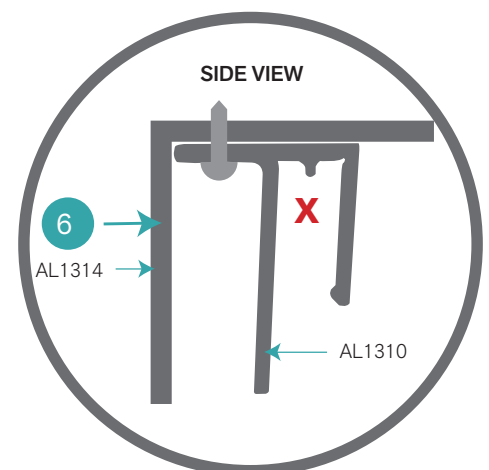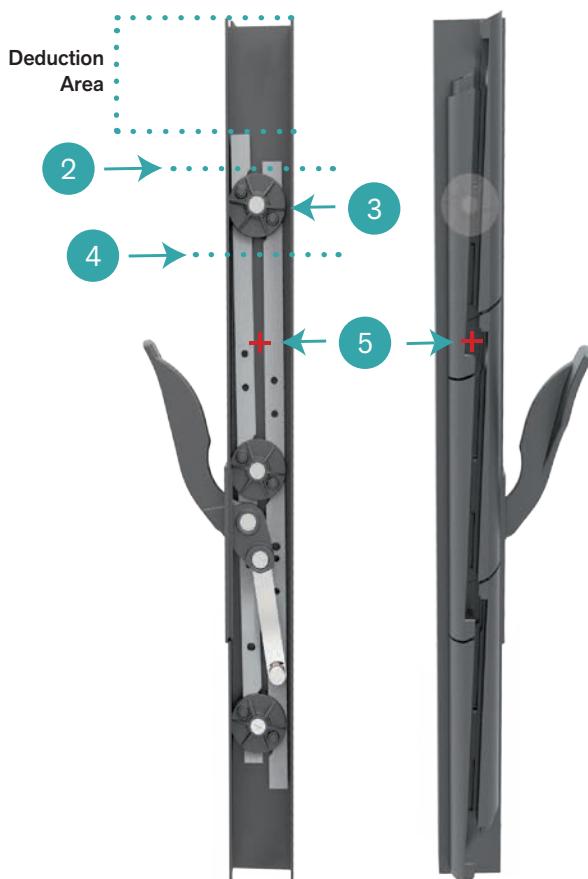

|(Deduction minus 5mm from internal width)|

INNOVATORS

OF HARDWARE FOR WINDOWS AND DOORS

VENTUS_LOUVRE_GALLERIES_2022 v1.6 - 20.03.2022

SYDNEY

38 Redfern St,
Wetherill Park
Sydney, NSW 2164
Australia
Ph: +61 2 9609 2555
www.doric.com.au

AUCKLAND

26/C Triton Drive,
Albany, North Shore,
Auckland 0632
New Zealand
Ph: +64 9 415 5535
www.doric.co.nz

KUALA LUMPUR

No.17 Jalan 51/203A,
Kawasan Perindustrian Tiong Nam,
Seksyen 51, 46050 Petaling Jaya,
Selangor, Malaysia
Ph: +603 777 33 628
www.doric.com.my



**ALCHIN
LONG
GROUP**



LOUVRE
GALLERIES



CHECK OUT OUR WEBSITE:
doricventus.com.au