

FITTING INSTRUCTIONS

DC224


BEFORE YOU START:

ENSURE THE DOOR OPENS AND CLOSES FREELY.

The following instructions feature an example of a installation on a left handed door. The door closer is non-handed and can be fitted on either left or right handed doors.


1 Fix Jamb Bracket

On the hinged side of door jamb, fix the Jamb Bracket about 35mm down from the top of the door jamb (1.1), and 25mm (or from at least 18mm) in from the door face (1.2).

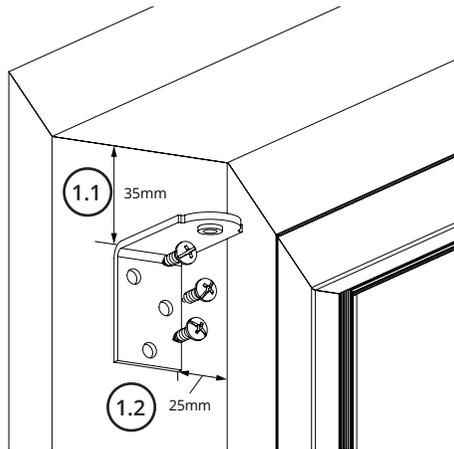

2 Connect Rod Jamb


Connect the Rod to the Jamb Bracket with the Locking Bolt (2.1). Do not apply nut and washer just yet.

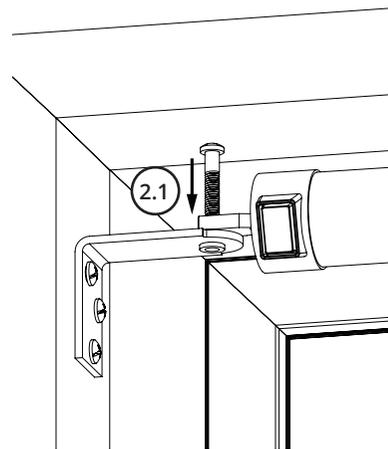

3 Add Door Bracket

Insert the Door Bracket onto the Door Closer's end footing (3.1). Close and latch the door.

Place the Closer with Door Bracket flush against the door (3.2) and level.

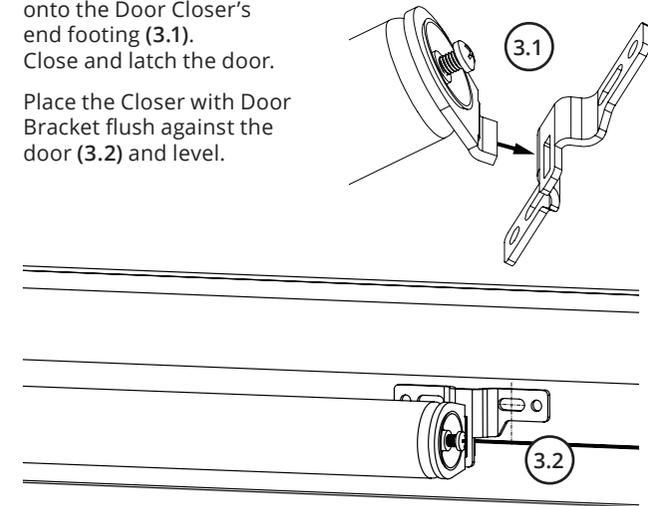


4 Fixing Door Bracket

Screw Slot (A) is always the elongated hole and found furthest from the door hinge, and Screw Slot (B) is always the circle hole on closest side to the door hinge.

HINGE ON LEFT SIDE

HINGE ON RIGHT SIDE

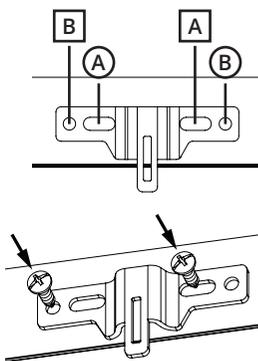


Example: Viewed from inside, hinge on left side

With the Closer still in place (and level), fix the bracket to door with a 19mm screw through the centre of the elongated Slot (A).

Remove Closer from the jamb bracket and door bracket, then using a 19mm screw, fix into Slot (B).



5 Secure Closer

Refit the Closer by inserting the foot into the door bracket first (5.1), then fixing the Rod to the Jamb Bracket with the Locking Bolt then secured (but just loose enough) with the washer and nut (5.2).

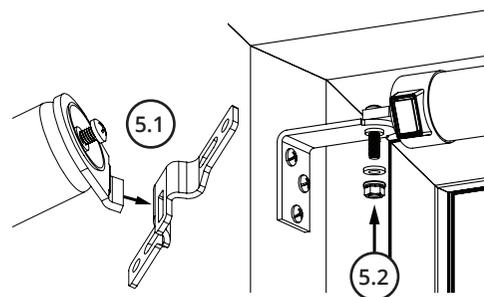

6 Closer Speed Adjustment

Moving screw clockwise will operate closer slower; anti-clockwise will operate closer faster.

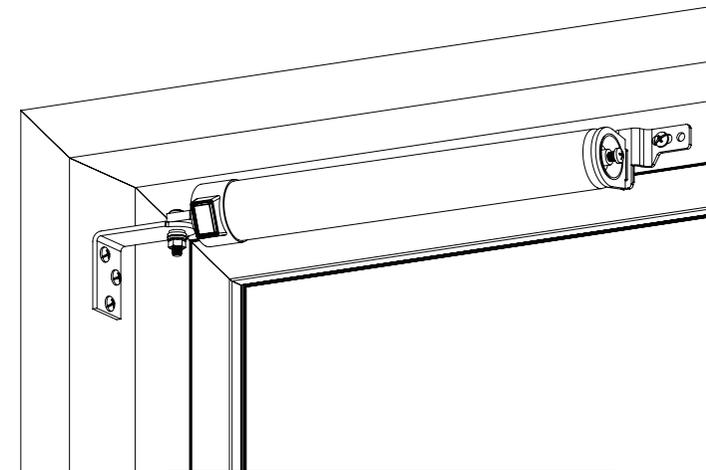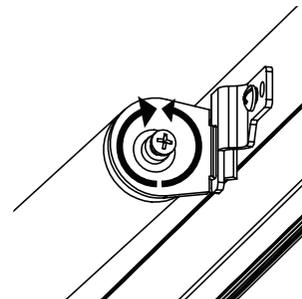

See the DC224 in action
WATCH THE VIDEO:



DC224 | PNEUMATICALLY DRIVEN DOOR CLOSER WITH BUTTON

Head office:
38 Redfern St
Wetherill Park NSW 2164
Australia

Ph: 1300 132 389
Fax: 1300 652 292
sales@doric.com.au
www.doric.com.au

